


10AWG Ground Cable

Cable Diagram

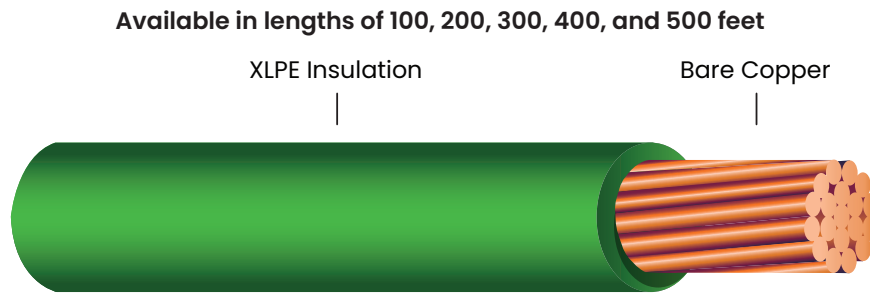

10 AWG 7-Strand Bare Copper with XLPE insulation, 1000V RHH/RHW-2 or 600V USE-2; c(UL) Rated as 1 kV RW90.

General purpose wiring for lighting and power

Cable Data

AWG	10
Strand	7
Nominal Insulation Wall Thickness	.045"
Nominal Diameter over Insulation	.204"
Approximate Net Weight lps/1M'	45
Copper Weight per lbs/1M'	32.05

Construction Details

Total Number of Conductors	1
Conductor Material	10 AWG 7-Strand Bare Copper
Insulation Material	Cross-linked Polyethylene
Conductor Insulation Color	Black

Applicable Standards and Ratings

Voltage Rating	1000 V for RHH/RHW-2 or RW90; 600 V for USE-2
Temperature Rating	-40°F to 194°F (-40°C to +90°C)
UL Type(s)	RHH/RHW-2/USE-2
c(UL) Type(s)	RW90
ROHS Compliant	Yes